

# Textured

---



*Inspired By Nature,  
Made Possible By...*

**CANCOS**  
TILE AND STONE

CERAMIC WALL TILE



BELTXBK1236BRK



BRICK

| 12 x 36 |

BELTXBK1236SEA



SEA

| 12 x 36 |

BELTXBKBN212



BULLNOSE

| 2 x 12 |

CERAMIC WALL TILE





BELTXRE1236BRK



BRICK

| 12 x 36 |

BELTXRE1236SEA



SEA

| 12 x 36 |

BELTXREBN212



BULLNOSE

| 2 x 12 |

CERAMIC WALL TILE




BELTXWH1236BRK



BRICK

| 12 x 36 |


BELTXWH1236SEA

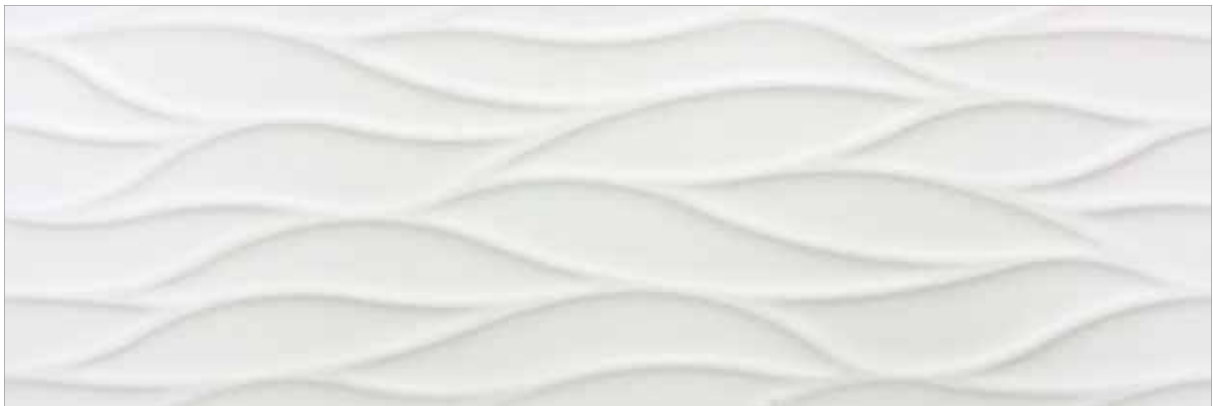

SEA

| 12 x 36 |

BELTXWHBN212



BULLNOSE

| 2 x 12 |

# Product Specifications

Tile Thickness	<b>5/16"</b>
Minimum Grout Joint Recommendation	<b>1/16"</b>
Shade Variation	<b>Low (V1)</b>

D.C.O.F. Wet	Moisture Absorption	Breaking Strength	MOH's Rating	Chemical Resistance	Abrasion Resistance
<b>&lt;0.42</b>	<b>&lt;20%</b>	<b>100-230 lbs</b>	<b>4.0-6.5</b>	<b>Resistant</b>	<b>N/A</b>

## COMMERCIAL USAGE

APPLICATION	INTERIOR			EXTERIOR	
	Residential	Light Commercial	Commercial	Residential	Commercial
Floors / Patios (covered & uncovered)					
Walls / Backsplashes	<b>X</b>	<b>X</b>	<b>X</b>		
Countertops					
Pool Deckings					
Pool Linings					

## RESIDENTIAL USAGE

APPLICATION	Walls	Countertops	Exterior Patios	Exterior Pool Decks
Floors	<b>X</b>			

### Notes:

- Suitable for exterior walls in non-freezing climates when proper installation methods are followed.
- Darker colors may show scratches.