
# Olother of Pearl-



## GLAMPWHPEN




## GLAMPWH312

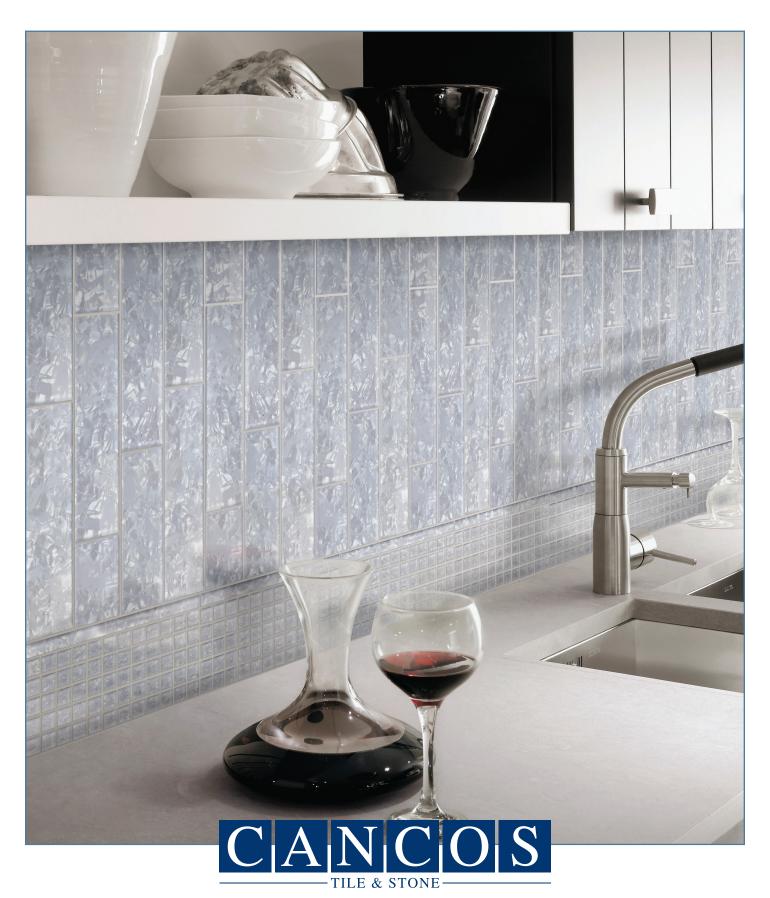

3x12


### GLAMPWH11



APPLICATION	INTERIOR			EXTERIOR		
	R	LC	НС	R	LC	НС
Walls/Backsplashes	Χ	Χ	X			
Floors						
Submerged Areas*	X	X	X			
Wet Areas	Χ	Χ	X			

\*For areas submerged in water, it is strictly recommended to use epoxy for both adhesive and grout.

LC - Light Commercial



CB - Cement Base EB - Epoxy Base

Glass Tile may be susceptible to scratching in handling and installation, as well as use. Expect variation of color from production run to production run. Please refer to the TCNA HANDBOOK for more specific information regarding installation.

# MAINTENANCE

R - Residential

Use a non-abrasive cloth and neutral detergents for cleaning. Avoid acid detergents, chemicals and solvents.

HC - Heavy Commercial