

Ibiza

CERAMIC TILE



CANCOS
TILE & STONE




ibiza
ALMOND

BELIBAL216



6 pcs. shown for shade variation - 2x16 -

BELIBALJOLLY



- .5x8 jolly -



ibiza
AQUA

BELIBAQ216



6 pcs. shown for shade variation - 2x16 -

BELIBAQJOLLY



- .5x8 jolly -



BELIBBK216



6 pcs. shown for shade variation - 2x16 -

BELIBBKJOLLY



- .5x8 jolly -



BELIBDP216



6 pcs. shown for shade variation - 2x16 -

BELIBDPJOLLY




- .5x8 jolly -



ibiza
GINGER

BELIBGI216

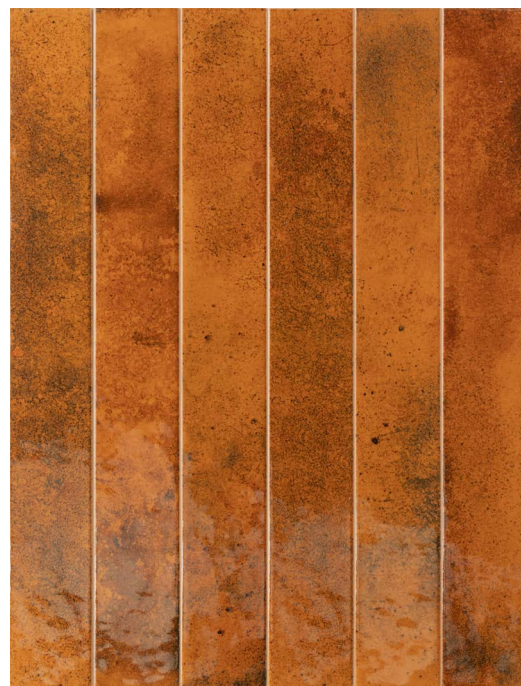

6 pcs. shown for shade variation - 2x16 -

BELIBGIJOLLY



- .5x8 jolly -



ibiza
GREEN

BELIBGN216



6 pcs. shown for shade variation - 2x16 -


BELIBGNJOLLY



- .5x8 jolly -



BELIBHE216

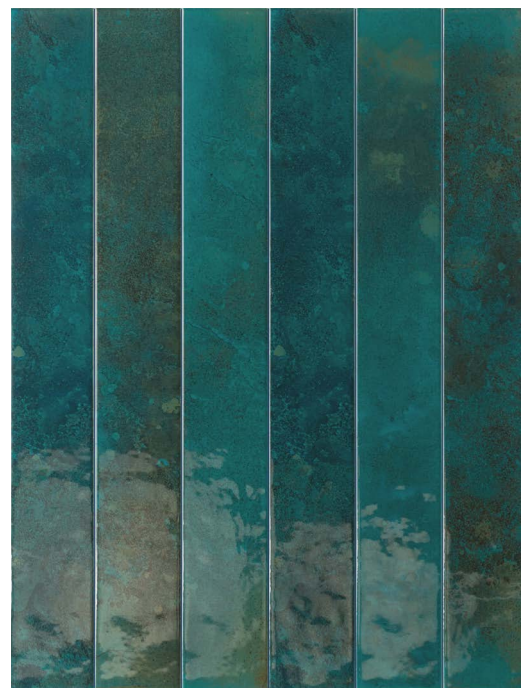

6 pcs. shown for shade variation - 2x16 -


BELIBHEJOLLY



- .5x8 jolly -



BELIBMO216

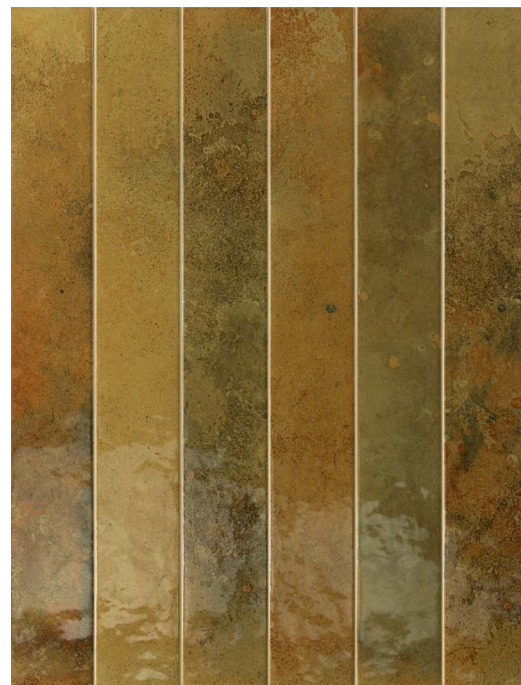

6 pcs. shown for shade variation - 2x16 -

BELIBMOJOLLY




- .5x8 jolly -




ibiza
PINE

BELIBPI216

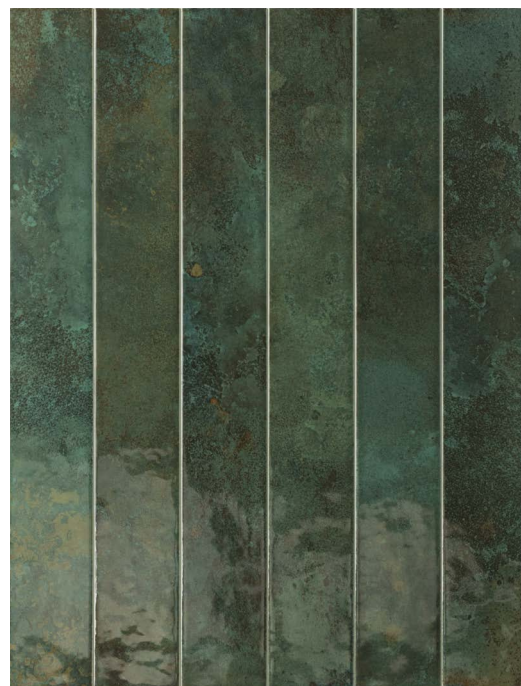

6 pcs. shown for shade variation - 2x16 -

BELIBPIJOLLY



- .5x8 jolly -




ibiza
WHITE

BELIBWH216



6 pcs. shown for shade variation - 2x16 -

BELIBWHJOLLY



- .5x8 jolly -

Ibiza

MADE IN

SPAIN


CANCOS
TILE & STONE

ABOUT




Ibiza is a colorful and bold collection of white-body ceramic tiles with a straight edge, designed for those seeking visual impact and a sophisticated aesthetic. Available in 10 colors with a high shade variation, Ibiza offers versatility and a modern style in any environment. Each color stands out with its glossy finish, which brings luminosity, depth, and character to any space. In a 2x16 format with a coordinating .5x8 jolly, Ibiza is ideal for creative applications in kitchens, bathrooms, living rooms and more.




Suggested Applications



Installation Suggestions



Tile Type



Shade Variation



Slip Resistance

ASTM C-1028
ANSI A137.1
DIN 51097/51130

DCOF	Values	Applications
	0.42	Recommended Standard DCOF value for wet/dry commercial flooring
	0.65	Recommended Standard DCOF value for ADA ramps

DIN 51130. *R9: Industry Standard/ADA Requirements **R11: Recommended For Exteriors

<input type="checkbox"/> R9* (3-10°)	<input type="checkbox"/> R10 (10-19°)	<input type="checkbox"/> R11** (19-27°)
<input type="checkbox"/> R12 (27-35°)	<input type="checkbox"/> R13 (>35°)	

DIN 51097

Class	Typical Applications	Critical Angle
<input type="checkbox"/> A	Barefoot, but mainly dry aisles and walkways, dry changing areas	≥12°
<input type="checkbox"/> B	Shower rooms, pool surrounds, wet changing areas, disinfectant spray areas (plus all Class A areas)	≥18°
<input type="checkbox"/> C	Areas constantly under water, e.g. steps into pools, foot baths, included pool surrounds, jacuzzis (plus all Class A&B areas)	≥24°

Scratch Resistance

MOH'S SCALE
UNI EN ISO
10545.6

MINERAL

1. Talc (Talc)	6. Microline (Glass, Glazed Tile)
2. Gypsum (Fingernail)	7. Quartz (Unglazed Porcelain)
3. Calcite (Penny)	8. Topaz (Granite)
4. Fluorite (Some Marbles)	9. Corundum (Ruby)
5. Apatite (Knife Blade)	10. Diamond (Diamond)

Industry standard ≤175mm²

Wear Resistance

PEI RATING
UNI EN ISO
10545.7

- ☒ Class 1: Walls only
 - ☐ Class 2: Residential floors w/minimal abrasive traffic
 - ☐ Class 3: Residential interiors/light commercial traffic
 - ☐ Class 4: Medium commercial applications
 - ☐ Class 5: All commercial applications/heavy traffic
- *Wear can vary greatly. please consult with a professional.

Stain Resistance

ASTM C1378-04
UNI EN ISO
10545.14

- 5: Removed after 5 minutes (hot water running)
- 4: Removed by manual cleaning (weak detergent)
- 3: Removed by mechanical cleaning (strong detergent)
- 2: Removed by immersion (24 hrs in suitable solvent)
- 1: Stain not removed

Water Absorption

ASTM C-373
UNI EN ISO
10545.3

<input type="checkbox"/> Absorbs 0-.5%	<input type="checkbox"/> Absorbs .5-3%	<input type="checkbox"/> Absorbs 3-7%	<input checked="" type="checkbox"/> Absorbs 7% +
Impervious Interior/Exterior Frost Resistant	Vitreous Interior/Exterior Frost Resistant	Semi-Vitreous Indoor Use Only	Non-Vitreous Indoor Use Only

Breaking Strength

ASTM C648
UNI EN ISO
10545.4



Facial Dimension

ASTM c499-09
UNI EN ISO
10545.02

	Standard	Tolerance	Result
flatness	± 5mm	± .5%	PASS
thickness	± 6mm	± .5%	PASS
straightness	± 4.5mm	± .5%	PASS
squareness	± 5.4mm	± .6%	PASS
sides L/W	± 1.1mm ± 4.5mm	± .5%	PASS

Chemical Resistance

ASTM C650
UNI EN ISO
10545.13

Allowances for:	result
Acid	GLA
Bases	GHB
Chemicals	GA

Leed Information



REQUIREMENTS
FOR COMMERCIAL
INTERIORS/NEW
CONSTRUCTION

Sustainable Sites	1 Point
Site selection SS CREDIT 1 Heat Island Effect-non roof Material with a solar reflectant index of at least 29.	<input type="checkbox"/>
Energy & Atmosphere	1 Point
EA CREDIT 4 Green Power: Products that optimize energy performance for floors and walls using thermal conductivity. BTU-FT	<input type="checkbox"/>
Indoor Environmental Quality	1 Point
Low-Emitting Materials-Flooring Systems IEQ CREDIT 3.1-7 Green Cleaning: Reducing occupants exposure to hazardous cleaning chemicals.	<input type="checkbox"/>
IEQ CREDIT 4.1 Low Emitting Adhesives: Products less than 65 G/L VOC	<input type="checkbox"/>
IEQ CREDIT 4.3 Low Emitting Materials: Flooring systems.	<input type="checkbox"/>

Materials & Resources	1 Point	2 Points
M&R CREDIT 2 Construction Waste Management: Recycling salvaged construction waste in to new reusable materials.	50% <input type="checkbox"/>	70% <input type="checkbox"/>
M&R CREDIT 4.1-4.2 Recycled Content: The sum of post consumer plus 1/2 of the pre consumer reps at least 10-20% of total value of materials.	10% <input type="checkbox"/>	20% <input type="checkbox"/>
M&R CREDIT 5 Regional Materials: Materials manufactured within 500 miles of the project site.	10% <input type="checkbox"/>	20% <input type="checkbox"/>
Innovation in Design	1-5 Points	
ID CREDIT 1 Innovation in Design Measurable exemplary environmental performance.	<input type="checkbox"/>	

Type:
Ceramic Tile

Product Line:
Ibiza

*The marketing name for this product is property of Cancos Tile & Stone.
This same product may be marketed under different names.*