

PARADISE

marble-look porcelain



CANCOS
TILE & STONE


BEIGE

Paradise





M ELEPABE2448
P ELEPABE2448L

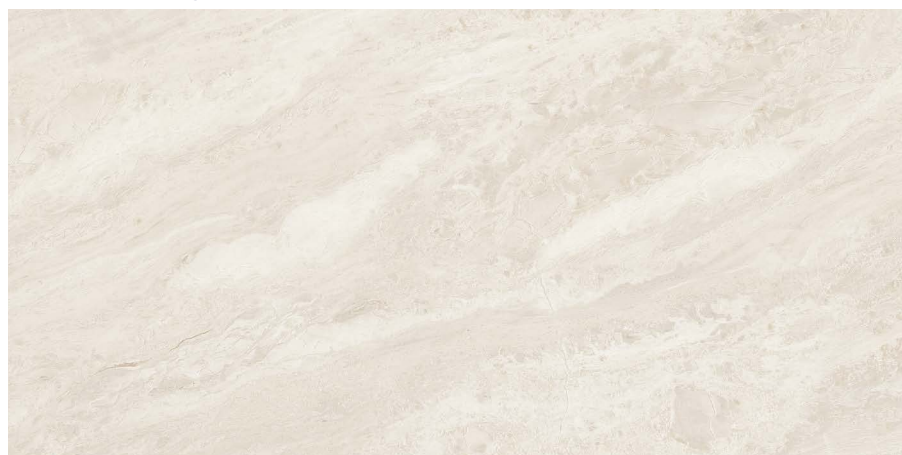

- 24x48 -

M ELEPABE1224
P ELEPABE1224L



- 12x24 -

P ELEPABE312L



- 3x12 -

M ELEPABEMOS22



- 2x2 mosaic -

P ELEPABEFLIPL



- flip mosaic -

P ELEPABEHEXL



- hex mosaic -

M ELEPABEBN324
P ELEPABEBN324L



- 3x24 bullnose -

M = MATTE FINISH
P = POLISHED FINISH


GREEN

Paradise





M ELEPAGN2448
P ELEPAGN2448L

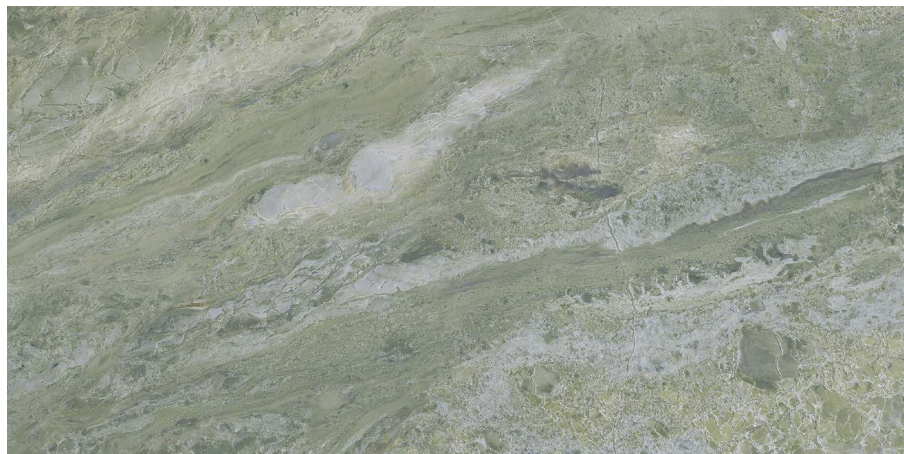

- 24x48 -

M ELEPAGN1224
P ELEPAGN1224L



- 12x24 -

P ELEPAGN312L



- 3x12 -

M ELEPAGNMOS22



- 2x2 mosaic -

P ELEPAGNFLIPL



- flip mosaic -

P ELEPAGNHEXL



- hex mosaic -

M ELEPAGNBN324
P ELEPAGNBN324L



- 3x24 bullnose -

M = MATTE FINISH
P = POLISHED FINISH

ICE

Paradise





M ELEPAIC2448
P ELEPAIC2448L



- 24x48 -

M ELEPAIC1224
P ELEPAIC1224L




- 12x24 -

P ELEPAIC312L



- 3x12 -

M ELEPAICMOS22




- 2x2 mosaic -

P ELEPAICFLIPL



- flip mosaic -

P ELEPAICHEXL



- hex mosaic -

M ELEPAICBN324
P ELEPAICBN324L



- 3x24 bullnose -

M = MATTE FINISH
P = POLISHED FINISH


IVORY

Paradise





M ELEPAIV2448
P ELEPAIV2448L

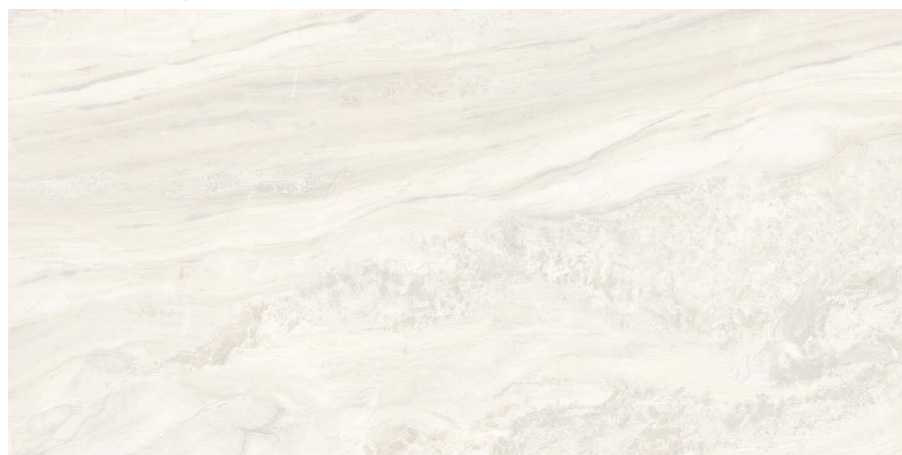

- 24x48 -

M ELEPAIV1224
P ELEPAIV1224L




- 12x24 -

P ELEPAIV312L



- 3x12 -

M ELEPAIVMOS22



- 2x2 mosaic -

P ELEPAIVFLIPL



- flip mosaic -

P ELEPAIVHEXL



- hex mosaic -

M ELEPAIVBN324
P ELEPAIVBN324L



- 3x24 bullnose -

M = MATTE FINISH
P = POLISHED FINISH

NAVY

Paradise





M ELEPANA2448
P ELEPANA2448L



- 24x48 -

M ELEPANA1224
P ELEPANA1224L



- 12x24 -

P ELEPANA312L



- 3x12 -

M ELEPANAMOS22



- 2x2 mosaic -

P ELEPANAFLIPL



- flip mosaic -

P ELEPANAHEXL



- hex mosaic -

M ELEPANABN324
P ELEPANABN324L



- 3x24 bullnose -

M = MATTE FINISH
P = POLISHED FINISH


PARADISE

PRODUCT TYPE: Porcelain



ABOUT THE LINE

Paradise was created to embellish the ever-changing places of everyday life. The exclusive polished finish ensures exceptional shine and the matte R10 finish allows a wide range of uses. Paradise is available in 12x24, 24x48, 3x12 tile sizes as well as a 3x24 bullnose and diverse mosaics. The three types of mosaics possess a strong decorative presence, pre-mounted on mesh for easy installation.

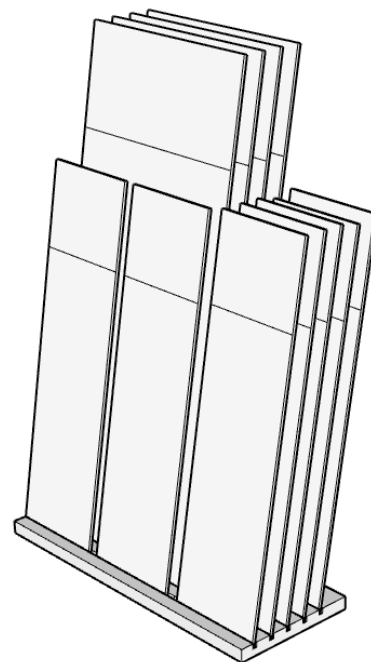

COLORS

ICE



IVORY



BEIGE




NAVY




GREEN




SIZES




12X24 M+P




24X48 M+P




3X12 P




3X24 BN M+P



2X2 MOS. M



HEX MOS. P




FLIP MOS. P






green & ivory


Suggested Applications




Installation Suggestions



Porcelain Type



Shade Variation



Slip Resistance

ASTM C-1028
ANSI A137.1
DIN 51097/51130

DCOF	Values	Applications
>0.42	0.42	Recommended Standard DCOF value for wet/dry commercial flooring
	0.65	Recommended Standard DCOF value for ADA ramps

DIN 51130. *R9: Industry Standard/ADA Requirements **R11: Recommended For Exterior

☒ R9* (3-10°)	☐ R10 (10-19°)	☐ R11** (19-27°)
☐ R12 (27-35°)	☐ R13 (>35°)	

Class	Typical Applications	Critical Angle
☐ A	Barefoot, but mainly dry aisles and walkways, dry changing areas	≥12°
☐ B	Shower rooms, pool surrounds, wet changing areas, disinfectant spray areas (plus all Class A areas)	≥18°
☐ C	Areas constantly under water, e.g. steps into pools, foot baths, included pool surrounds, jacuzzis (plus all Class A&B areas)	≥24°

Scratch Resistance

MOH'S SCALE
UNI EN ISO
10545.6

MINERAL	
1. Talc (Talc)	6. Microline (Glass, Glazed Tile)
2. Gypsum (Fingernail)	7. Quartz (Unglazed Porcelain)
3. Calcite (Penny)	8. Topaz (Granite)
4. Flourite (Some Marbles)	9. Corundum (Ruby)
5. Apatite (Knife Blade)	10. Diamond (Diamond)
Industry standard ≤175mm ²	

Wear Resistance

PEI RATING
UNI EN ISO
10545.7

- ☐ Class 1: Walls only
 - ☐ Class 2: Residential floors w/minimal abrasive traffic
 - ☐ Class 3: Residential interiors/light commercial traffic
 - ☐ Class 4: Medium commercial applications
 - ☒ Class 5: All commercial applications/heavy traffic
- *Wear can vary greatly. please consult with a professional.*

Stain Resistance

ASTM C1378-04
UNI EN ISO
10545.14

- 5: Removed after 5 minutes (hot water running)
- 4: Removed by manual cleaning (weak detergent)
- 3: Removed by mechanical cleaning (strong detergent)
- 2: Removed by immersion (24 hrs in suitable solvent)
- 1: Stain not removed

Water Absorption

ASTM C-373
UNI EN ISO
10545.3

☒ Absorbs 0-.5%	☐ Absorbs .5-3%	☐ Absorbs 3-7%	☐ Absorbs 7% +
Impervious Interior/Exterior Frost Resistant	Vitreous Interior/Exterior Frost Resistant	Semi-Vitreous Indoor Use Only	Non-Vitreous Indoor Use Only

Breaking Strength

ASTM C648
UNI EN ISO
10545.4



Facial Dimension

ASTM c499-09
UNI EN ISO
10545.02

	Standard	Tolerance	Result
flatness	± 5mm	± .5%	PASS
thickness	± 6mm	± .5%	PASS
straightness	± 4.5mm	± .5%	PASS
squareness	± 5.4mm	± .6%	PASS
sides L/W	± 1.1mm ± 4.5mm	± .5%	PASS

Chemical Resistance

ASTM C650
UNI EN ISO
10545.13

Allowances for:	result
Acid	PASS
Bases	PASS
Chemicals	PASS

Leed Information



REQUIREMENTS
FOR COMMERCIAL
INTERIORS/NEW
CONSTRUCTION

Sustainable Sites	1 Point
SS CREDIT 1 Heat Island Effect-non roof Material with a solar reflectant index of at least 29.	☒
Energy & Atmosphere	1 Point
EA CREDIT 4 Green Power: Products that optimize energy performance for floors and walls using thermal conductivity. BTU-FT	☒
Indoor Environmental Quality	1 Point
IEQ CREDIT 3.1-7 Green Cleaning: Reducing occupants exposure to hazardous cleaning chemicals.	☐
IEQ CREDIT 4.1 Low Emitting Adhesives: Products less than 65 G/L VOC	☐
IEQ CREDIT 4.3 Low Emitting Materials: Flooring systems.	☒


Materials & Resources	1 Point	2 Points
M&R CREDIT 2 Construction Waste Management: Recycling salvaged construction waste in to new reusable materials.	50% ☐	70% ☒
M&R CREDIT 4.1-4.2 Recycled Content: The sum of post consumer plus 1/2 of the pre consumer reps at least 10-20% of total value of materials.	10% ☐	20% ☐
M&R CREDIT 5 Regional Materials: Materials manufactured within 500 miles of the project site.	10% ☐	20% ☐
Innovation in Design	1-5 Points	
ID CREDIT 1 Innovation in Design Measurable exemplary environmental performance.	☒	

Type:
Porcelain Stoneware

Product Line:
Paradise (matte)

*The marketing name for this product is property of Canco's Tile & Stone.
This same product may be marketed under different names.*


Suggested Applications




Installation Suggestions



Porcelain Type



Shade Variation



Slip Resistance

ASTM C-1028
ANSI A137.1
DIN 51097/51130

DCOF	Values	Applications
	0.42	Recommended Standard DCOF value for wet/dry commercial flooring
	0.65	Recommended Standard DCOF value for ADA ramps

DIN 51130. *R9: Industry Standard/ADA Requirements **R11: Recommended For Exterior

☐ R9* (3-10°)	☐ R10 (10-19°)	☐ R11** (19-27°)
☐ R12 (27-35°)	☐ R13 (>35°)	

DIN 51097

Class	Typical Applications	Critical Angle
☐ A	Barefoot, but mainly dry aisles and walkways, dry changing areas	≥12°
☐ B	Shower rooms, pool surrounds, wet changing areas, disinfectant spray areas (plus all Class A areas)	≥18°
☐ C	Areas constantly under water, e.g. steps into pools, foot baths, included pool surrounds, jacuzzis (plus all Class A&B areas)	≥24°

Scratch Resistance

MOH'S SCALE
UNI EN ISO
10545.6

MINERAL	
1. Talc (Talc)	6. Microline (Glass, Glazed Tile)
2. Gypsum (Fingernail)	7. Quartz (Unglazed Porcelain)
3. Calcite (Penny)	8. Topaz (Granite)
4. Flourite (Some Marbles)	9. Corundum (Ruby)
5. Apatite (Knife Blade)	10. Diamond (Diamond)

Industry standard ≤175mm²

Wear Resistance

PEI RATING
UNI EN ISO
10545.7

- ☐ Class 1: Walls only
 - ☐ Class 2: Residential floors w/minimal abrasive traffic
 - ☒ Class 3: Residential interiors/light commercial traffic
 - ☐ Class 4: Medium commercial applications
 - ☐ Class 5: All commercial applications/heavy traffic
- *Wear can vary greatly. please consult with a professional.

Stain Resistance

ASTM C1378-04
UNI EN ISO
10545.14

3,4

- 5: Removed after 5 minutes (hot water running)
- 4: Removed by manual cleaning (weak detergent)
- 3: Removed by mechanical cleaning (strong detergent)
- 2: Removed by immersion (24 hrs in suitable solvent)
- 1: Stain not removed

Water Absorption

ASTM C-373
UNI EN ISO
10545.3

☒ Absorbs 0-.5%	☐ Absorbs .5-3%	☐ Absorbs 3-7%	☐ Absorbs 7% +
Impervious Interior/Exterior Frost Resistant	Vitreous Interior/Exterior Frost Resistant	Semi-Vitreous Indoor Use Only	Non-Vitreous Indoor Use Only

Breaking Strength

ASTM C648
UNI EN ISO
10545.4

>45
N/MM2



Facial Dimension

ASTM c499-09
UNI EN ISO
10545.02

	Standard	Tolerance	Result
flatness	± 5mm	± .5%	PASS
thickness	± 6mm	± .5%	PASS
straightness	± 4.5mm	± .5%	PASS
squareness	± 5.4mm	± .6%	PASS
sides L/W	± 1.1mm ± 4.5mm	± .5%	PASS

Chemical Resistance

ASTM C650
UNI EN ISO
10545.13



Allowances for:

	result
Acid	PASS
Bases	PASS
Chemicals	PASS

Leed Information



REQUIREMENTS
FOR COMMERCIAL
INTERIORS/NEW
CONSTRUCTION

Sustainable Sites	1 Point
SS CREDIT 1 Heat Island Effect-non roof Material with a solar reflectant index of at least 29.	☒
Energy & Atmosphere	1 Point
EA CREDIT 4 Green Power: Products that optimize energy performance for floors and walls using thermal conductivity. BTU-FT	☒
Indoor Environmental Quality	1 Point
IEQ CREDIT 3.1-7 Green Cleaning: Reducing occupants exposure to hazardous cleaning chemicals.	☐
IEQ CREDIT 4.1 Low Emitting Adhesives: Products less than 65 G/L VOC	☐
IEQ CREDIT 4.3 Low Emitting Materials: Flooring systems.	☒

Materials & Resources	1 Point	2 Points
M&R CREDIT 2 Construction Waste Management: Recycling salvaged construction waste in to new reusable materials.	50% ☐	70% ☒
M&R CREDIT 4.1-4.2 Recycled Content: The sum of post consumer plus 1/2 of the pre consumer reps at least 10-20% of total value of materials.	10% ☐	20% ☒
M&R CREDIT 5 Regional Materials: Materials manufactured within 500 miles of the project site.	10% ☐	20% ☐
Innovation in Design	1-5 Points	
ID CREDIT 1 Innovation in Design Measurable exemplary environmental performance.	☒	

Type:
Porcelain Stoneware

Product Line:
Paradise (polished)

*The marketing name for this product is property of Canco's Tile & Stone.
This same product may be marketed under different names.*

