

ITALY *Porcelain Pavers*




CANCOS
TILE & STONE



Avatar

ANTRACITE · GRIGIO CHIARO · GRIGIO · TORTORA
NON-STOCK / SPECIAL ORDER (4-6 WEEKS)

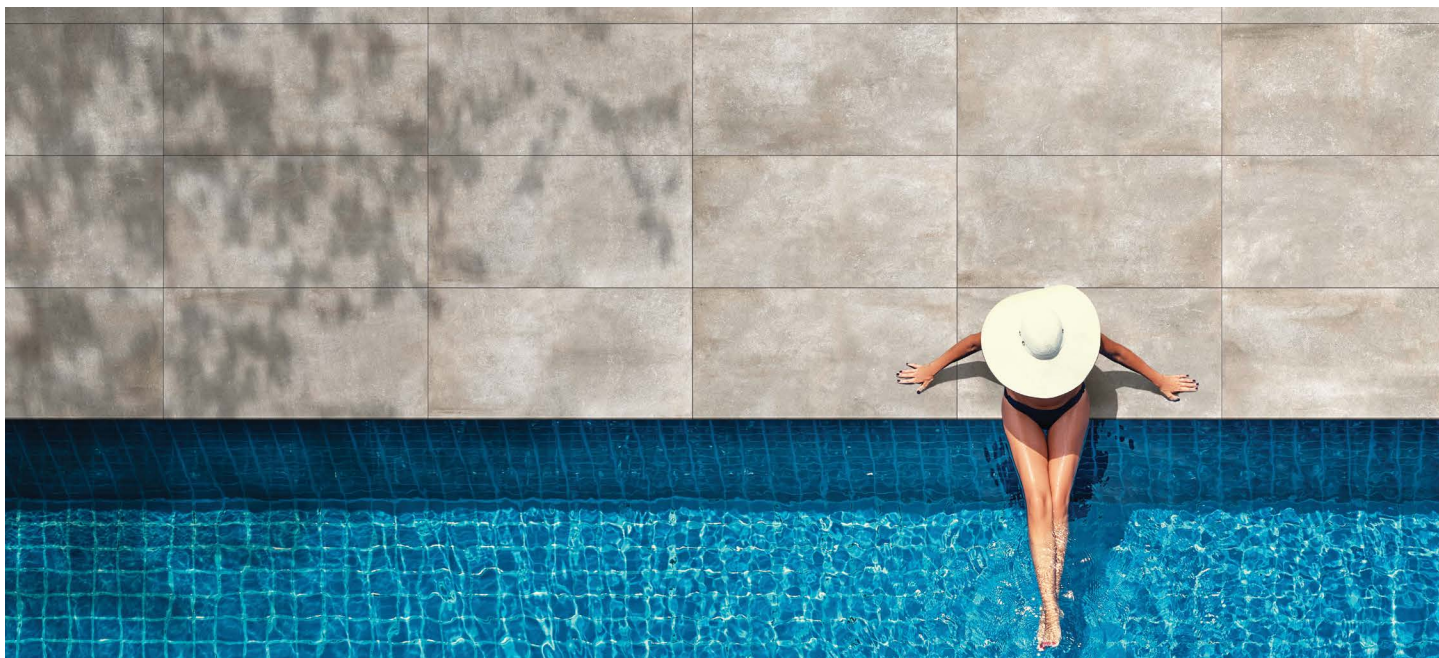

antracite



PAVAVAN24 | 24 x 24 |

grigio chiaro



PAVAVGC24 | 24 x 24 |
*48x48 also available

grigio



PAVAVGR24 | 24 x 24 |
*48x48 also available

tortora



PAVAVTO24 | 24 x 24 |
*48x48 also available



PAVAVAN2448 | 24 x 48 |



PAVAVGC2448 | 24 x 48 |



PAVAVGR2448 | 24 x 48 |



PAVAVTO2448 | 24 x 48 |

Blue Stone

BLACK · GRAY

NON-STOCK / SPECIAL ORDER (4-6 WEEKS)



PAVBSSB24



black

| 24 x 24 |

PAVBSSG24



gray

| 24 x 24 |

Element

DUNE · NUIT · OPAL · TAUPE
NON-STOCK / SPECIAL ORDER (6-8 WEEKS)



PAVELTA32



taupe | 32 x 32 |

PAVELTA24



taupe | 24 x 24 |

PAVELTA2448



taupe | 24 x 48 |

PAVELDU32



dune | 32 x 32 |

PAVELDU24



dune | 24 x 24 |


PAVELDU2448



dune | 24 x 48 |



PAVELNU32

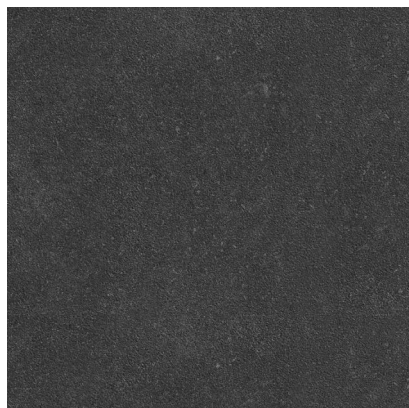

nuit | 32 x 32 |

PAVELNU24



nuit | 24 x 24 |

PAVELNU2448




nuit | 24 x 48 |

PAVELOP32



opal | 32 x 32 |

PAVELOP24



opal | 24 x 24 |

PAVELOP2448



opal | 24 x 48 |


Primi

CEMENTO · CENERE · SANDALO

NON-STOCK / SPECIAL ORDER (6-8 WEEKS)



PAVPMCM32

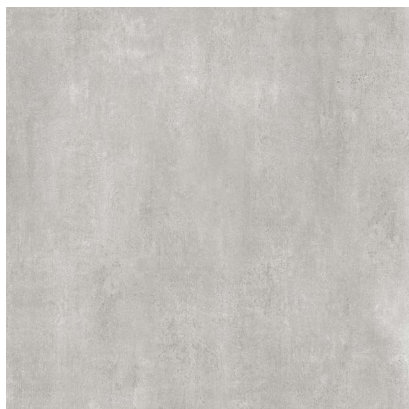

cemento

| 32 x 32 |

PAVPMCM24



cemento


| 24 x 24 |

PAVPMCM1648




cemento

| 16 x 48 |

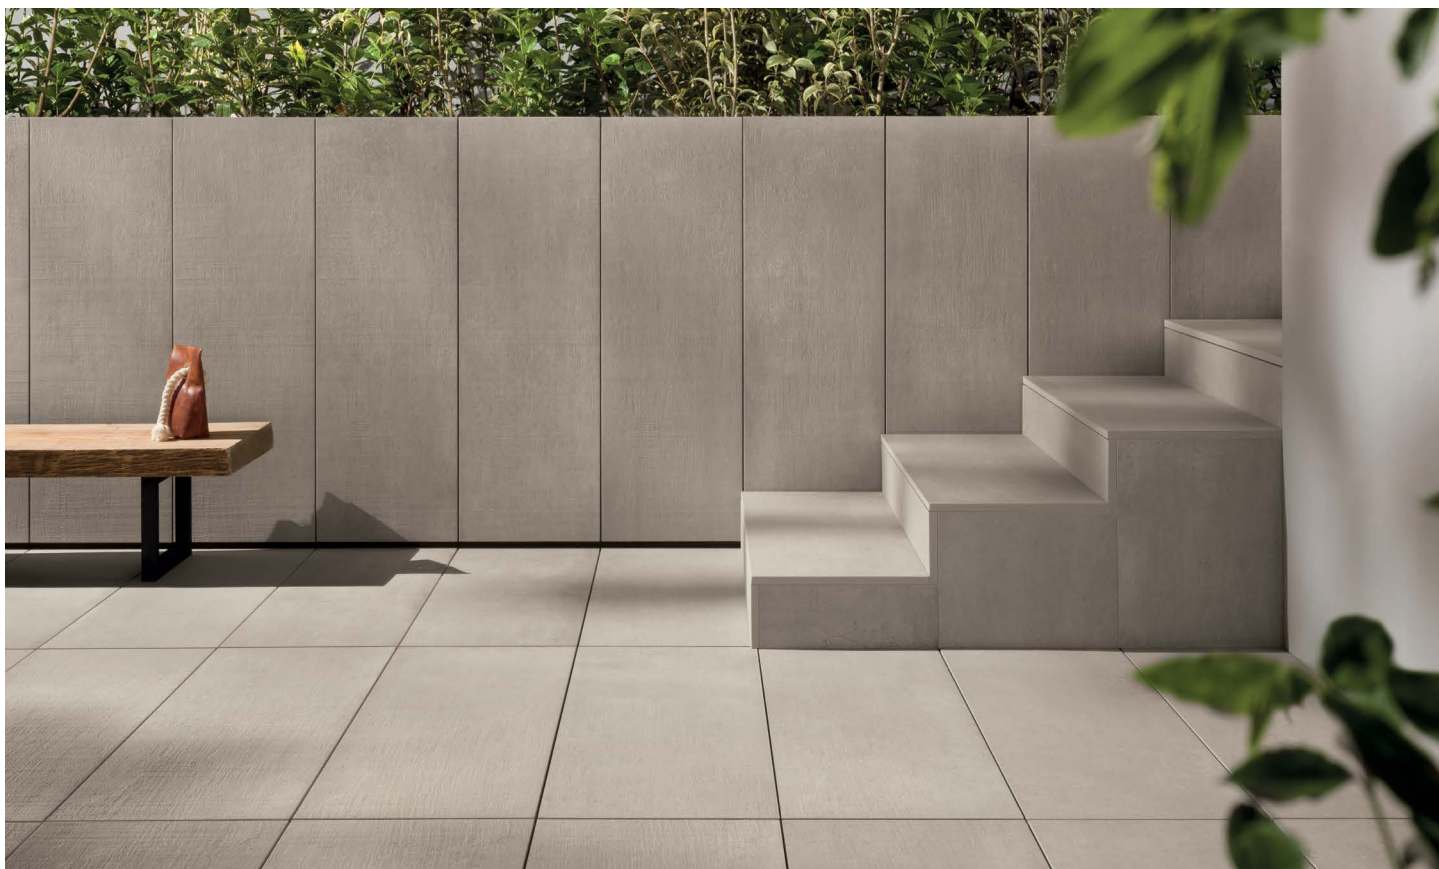

PAVPMCN32

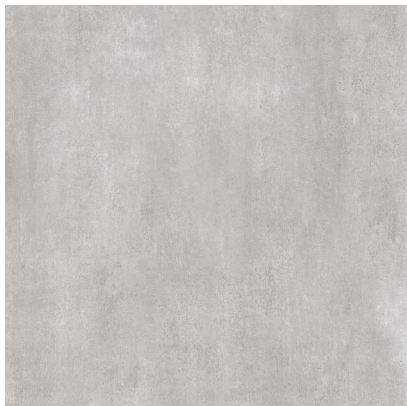

cenere

| 32 x 32 |

PAVPMCN24



cenere

| 24 x 24 |

PAVPMCN1648



cenere

| 16 x 48 |

PAVPMSA32



sandalo

| 32 x 32 |

PAVPMSA24



sandalo

| 24 x 24 |

PAVPMSA1648



sandalo

| 16 x 48 |

Soap Stone

DARK · LIGHT

NON-STOCK / SPECIAL ORDER (4-6 WEEKS)



PAVSSDA2448
PAVSSDA1632

PAVSSLI2448
PAVSSLI1632



dark | 24 x 48, 16 x 32 |



light | 24 x 48, 16 x 32 |

Sol

BEIGE · GRIGIO · NERO

NON-STOCK / SPECIAL ORDER (4-6 WEEKS)



PAVSOBE24



beige

| 24 x 24 |

PAVSOGR24



grigio

| 24 x 24 |

PAVSONE24



nero

| 24 x 24 |

Wood MAPLE

NON-STOCK / SPECIAL ORDER (5-6 WEEKS)



PAVWOMA24



| 24 x 24 |

PAVWOMA848



| 8 x 48 |

PAVWOMA1648




| 16 x 48 |

Wood NUT

NON-STOCK / SPECIAL ORDER (5-6 WEEKS)



PAVWONU24

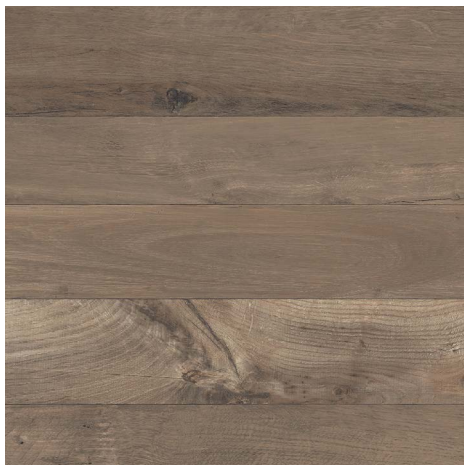

| 24 x 24 |

PAVWONU848



| 8 x 48 |

PAVWONU1648



| 16 x 48 |

Wood OAK

NON-STOCK / SPECIAL ORDER (5-6 WEEKS)



PAVWOOA24



| 24 x 24 |

PAVWOOA848



| 8 x 48 |

PAVWOOA1648



| 16 x 48 |

Zenith GRIGIO

NON-STOCK / SPECIAL ORDER (4-6 WEEKS)




PAVZEGR2436




grigio

| 24 x 36 |

WHERE TO INSTALL 2CM PORCELAIN PAVERS




Sidewalk cafes




Walkways and pathways



Gardens and patios




Garden paths




Beach resorts




Swimming-pools




Terraces and balconies




Gazebos




Exhibitions and events



Public parks



Public parkings

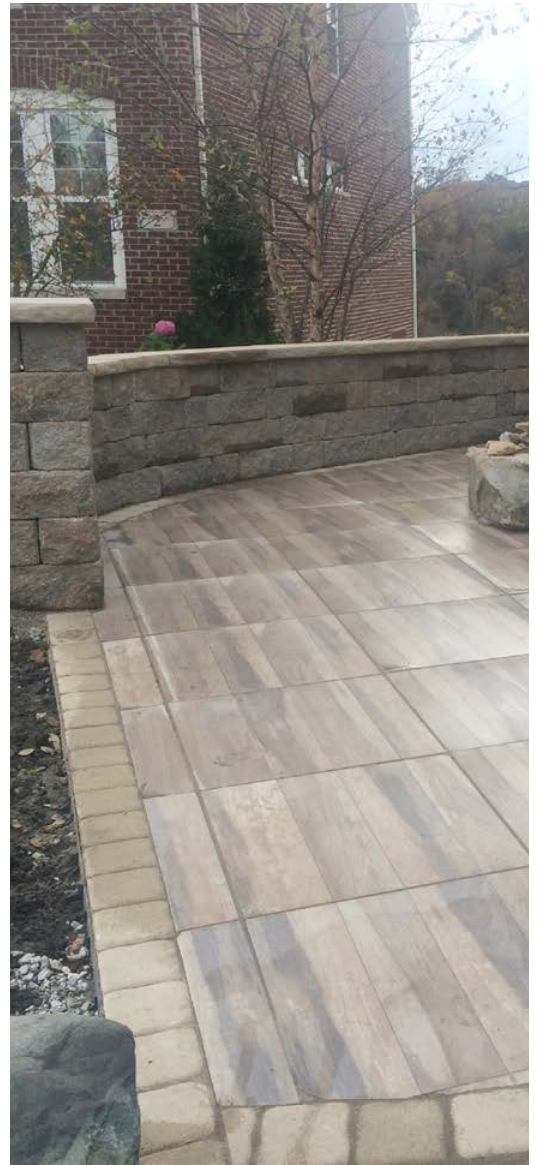

WHY CHOOSE 2CM PORCELAIN PAVERS




Thermal shock resistant.
(-40°F - 210°F)



Superior in fire resistance
and durability to wood tiles



Easy to clean. Stain,
chemical and salt resistant




Superior in strength and
impact resistance to
ceramic tiles (supports over
2000lb), lighter and easier
to handle than concrete
blocks



Virtually no maintenance




Slip resistant and quick
draining




Easy to install



Removable and reusable
POPA 2.0 is ideal both for
temporary flooring and for
permanent flooring




Versatile installation.
Various installation methods
including pedestal set,
gravel and grass set.
They offer endless
opportunities for landscape
design creativity in both
domestic and commercial
applications.




Fade resistant



Available in a broad range
of colors/styles




Massive over life cost
savings more cost effective
than grating or grid
structures for elevated
paving installations




Resistant to salt corrosion.



Resistant to attack from mould, moss and verdigris treatments.




Resistant to efflorescence and other marks.



Durable: resistant to heavy vehicle and pedestrian traffic.



Frost-proof.



Hypoallergenic. No VOC.



Easy to sterilize.



Eco-friendly maintenance.



Easy to clean.



Recyclable and ecological.



New solution in extra-thick porcelain stoneware for outdoor trilling. 2 cm thick, colored fine porcelain stoneware slabs obtained from atomizing high-class clays, quartzes and metal oxides pressed at 400 kg/cm², completely sintered at a temperature of 1200°C and then squared using a system of abrasive grinders.

TECHNICAL CHARACTERISTICS OF 2CM PORCELAIN PAVERS

Characteristic		Test Method	Value*
Thickness			3/4"
Weight			9 lb/sq.ft
Water absorption		ISO10545-3	<0.1%
Breaking strength		ISO 10545-4	> 2200 lbf
Modulus of rupture		ISO 10545-4	> 7000 psi
Static load capacity *	center	EN 12825	>1700 lbf
	side center		> 1200 lbf
	diagonal		> 1500 lbf
Bending strength		EN1339	Class 14
Impact resistance		ISO 10545-5	>0.55
Resistance to abrasion		ISO 10545-6	conforms
Resistance to abrasion		ISO 10545-6	conforms
Frost resistant		ISO 10545-12	resistant
Resistance to thermal shock		ISO 10545-9	resistant
Resistance to chemicals		ISO 10545-13	UA
Resistance to acids & alkalis		ISO 10545-13	ULA/UHA
Resistance to staining		ISO 10545-14	Class 5
Fire resistance		EN3501-1	A1-A1 FL
Barefoot ramp test		DIN 51097	A+B+C
Shod ramp test		DIN 51130	R11
Static coefficient of friction		ASTM C1028-2007	>0.6 wet >0.6 dry
Slip resistance		DM236/89 B.C.R.A.	>0.40

*Average values - compliant with relevant standard


** 24" x 24" pavers



BAGNI CHRISTIAN, RIMINI, ITALY



I'PARK MALL, SEOUL, KOREA

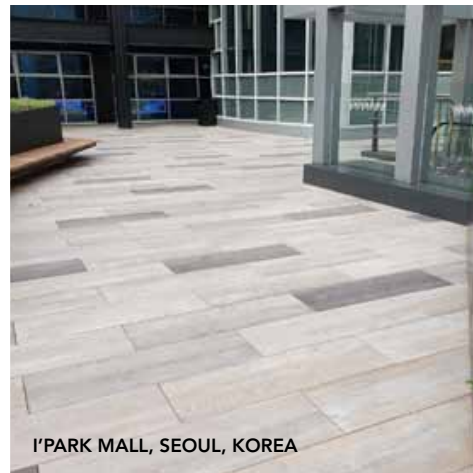

I'PARK MALL, SEOUL, KOREA



ERACLE SPORTS CENTER, COMO, ITALY



BUCAREST, ROMANIA



BRISBANE, AUSTRALIA



RESIDENZA SAN MARTINO, LUGANO, SWITZERLAND



ADMIRAL PARK HOTEL,
BOLOGNA, ITALY



HOTEL, STOCKHOLM, SWEDEN



PRIVATE HOUSE, POLAND



THE THEATER OF DISAPPEARANCE
Adrian Villar Rijas
Metropolitan Museum of Art, New York
14/04/2017 - 29/10/2017

Photos:
CANCOS TILE AND STONE



19